





CALCARE


Its subtle, earthy tones blend seamlessly with a variety of design styles, from rustic to contemporary. The limestone effect tile is not only aesthetically pleasing but also durable and easy to maintain, making it an excellent choice for high-traffic areas. Its natural texture adds depth and character to floors, walls, and even outdoor spaces. Transform your space into a serene oasis with the understated beauty of limestone effect tiles, and enjoy the harmonious balance they bring to your home.




P
L
A
T
I
N
U
M

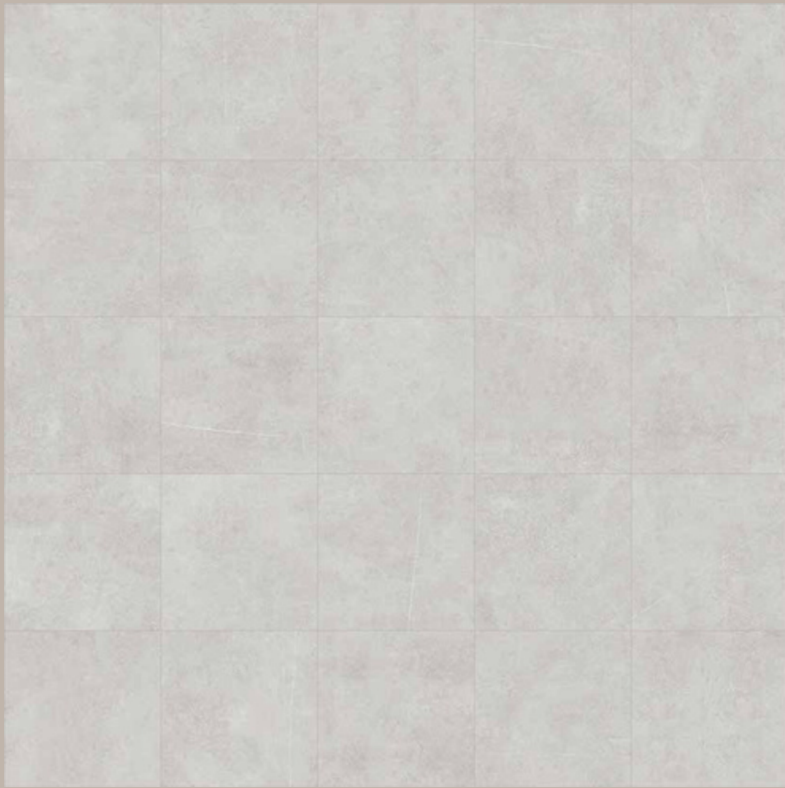

24 x 48




32 x 32




12 x 24


Mosaics




2 in Hexagon



6 in Hexagon




2x2




3 x 24
Bullnose


D
I
M

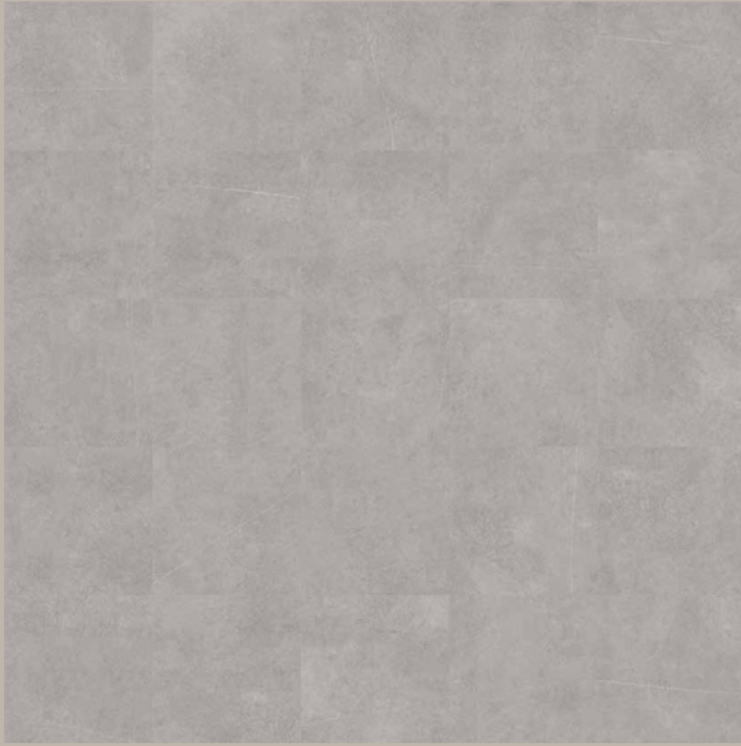

Mosaics




2 in Hexagon




6 in Hexagon

G
R




24 x 48




2x2

A
Y



32 x 32





12 x 24




3 x 24
Bullnose


C
H
A
R
C
O
A
L

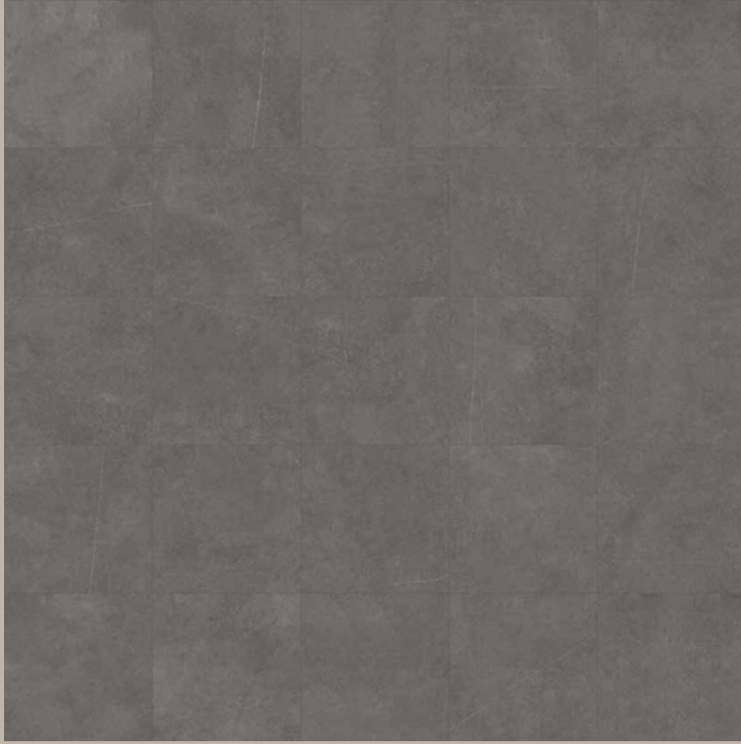

24 x 48




32 x 32




12 x 24


Mosaics



2 in Hexagon



6 in Hexagon





2x2




3 x 24
Bullnose


N
I
C
K
E
L

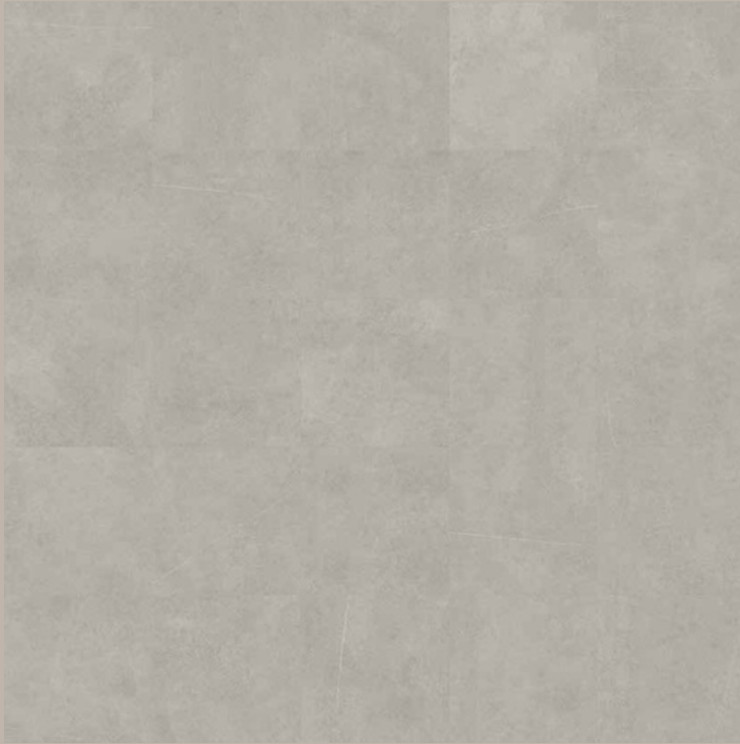

24 x 48




32 x 32




12 x 24


Mosaics




2 in Hexagon



6 in Hexagon



2x2



3 x 24
Bullnose

PACKING INFORMATION:

	SF/PC	SF/BOX	Thickness
24x48	7.75	15.5	10.3 mm
32x32	6.89	13.78	11.5mm
12x24	1.94	15.5	8.4 mm
2x2	0.958	9.58	8.4 mm
2 in Hexagon	0.969	9.69	8.4 mm
6 in Hexagon	0.797	7.97	8.4 mm
3x24 Bullnose		15 pc	8.4 mm

TECHNICAL INFORMATION:

Characteristics and Test Methods	Requirements ABSI A 137.1	Our General Values
Water Absorption	ANSI / ISO- (%)	Average Value ≤ 0.4 %
Classification	Definition § 3.0	Porcelain Tiles Physical Properties
Breaking Strength	ANSI - (lbf) ISO - (N)	>400 >1750
Abrasion Resistance	ANSI / ISO	Class 4
Frost Resistance	ANSI / ISO	PASS
Scratch Hardness of Surface	ANSI / ISO - (Mohs)	9
Slip Resistance	ANSI - DCOF (WET) ISO - R Value	DCOF ≥ 0.42 R10
Color Uniformity (ASTM C 609 and ANSI A 137.1 Section 9.3)	V0-3	V2
		Chemical Properties
Chemical Resistance (ASTM C 650)	ANSI / ISO	Class A
Stain Resistance	ANSI ISO	Class A Class 5
Recommended Applications	Interior: Residential/Commercial Walls & Floors	Exterior: Residential/Commercial Walls

SHADE
VARIATION
V2 Slight

