




Galicia

BRING THE SPANISH
CLIFFSIDE INTO
YOUR HOME

WITH A PALETTE THAT ECHOES THE NATURAL BEAUTY OF ITS SOURCE, EACH TILE IN THE COLLECTION BOASTS INTRICATE PATTERNS AND SUBTLE TEXTURES THAT MIMIC THE AUTHENTIC CHARM OF SLATE. THIS COLLECTION OFFERS BOTH DURABILITY AND SOPHISTICATION, MAKING THEM A POPULAR CHOICE FOR DESIGNERS AND HOMEOWNERS ALIKE. THIS PORCELAIN SERIES TRANSFORMS SPACES INTO ELEGANT SANCTUARIES, EFFORTLESSLY MARRYING FUNCTIONALITY WITH AESTHETIC APPEAL.



COLORS:

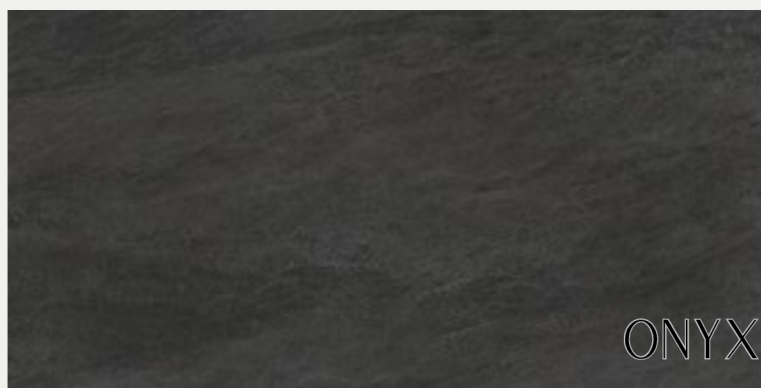

SIZES:

	SF/PC	SF/BOX	Thickness
24x48	7.745	15.49	9mm
12x24	1.937	13.56	9mm
4x12	0.32	9.04	9mm
2x2	0.969	9.69	9mm
3x24 Bullnose		15 pc	9mm

TECHNICAL INFORMATION:

Characteristics and Test Methods	Requirements ABSI A 137.1	Our General Values
Determination of water absorption- (ASTM C 373)	Average Value $E_b \leq 0.5\%$	Average Value $\leq 0.6\%$
Classification	Definition § 3.0	Porcelain Tiles Physical Properties
Breaking Strength- (ASTM C 648)	Average ≥ 250 lbf (1.11 kN) Individual ≥ 225 lbf (1.00 kN)	Complies
Visible Abrasion- (ASTM C 1027)	As Reported	Class 0-5
Recommended Use	EN ISO 10545-7	Class 4
Thermal Shock Resistance (ASTM C 428)	Pass	Complies
Crazing Resistance (ASTM C 424)	Pass	Complies
Resistance to Freeze/Thaw Cycling (ASTM C 1026)	As Reported	Resistant
DCOF Resistance (ANSI A 137.1 Section 9.6)	≥ 0.42	DCOF ≥ 0.42
Bond Strength (ASTM C 482)	≥ 50 psi (0.34 MPa)	> 1 MPa
Color Uniformity (ASTM C 609 and ANSI A 137.1 Section 9.3)	V 0-3	V3
Chemical Properties		
Chemical Resistance (ASTM C 650)	As Reported	Resistant
Stain Resistance (ASTM C 1378)	As Reported	Resistant
Dimensions- Calibrated Tiles		
Dimensions- (ASTM C 499) - (ASTM C 485) - (ASTM C 502)	See ANSI A 137.1 - Tab.10	Complies
Dimensions- Rectified Tiles		
Dimensions- (ASTM C 499) - (ASTM C 485) - (ASTM C 502)	See ANSI A 137.1 - Tab.10	Complies
Scratch Hardness of Surface According to Mohs	ex BS 6431-13 / ex EN 101	≥ 5



LEED® CERTIFICATION COMPLIANT